

WireXpress

More Than Wire



TelcoFlex®



Southwire®
WE DELIVER POWER... RESPONSIBLY

Got It. | wirexpress.com

TelcoFlex®

The Telecom Industry's Ultimate DC & AC Power Cable

TelcoFlex® cable is a leading product in the telecom power cable industry. TelcoFlex® cable, the premiere central office power cable, is manufactured by Southwire Company, LLC. Southwire's TelcoFlex® cable now meets IEC requirements. WireXpress stocks TelcoFlex® List II, List III and List IV and has availability in colors and tracers.

TelcoFlex® II

600 Volts, Tinned Copper Conductor

Class I Flexible Strand Without Braid, CSA Certified, Non-Halogen Insulation

14 AWG Thru 750 KCMIL - Single Conductor

Applications

TelcoFlex® II Central Office Power Wire and Cable Class I Flexible Tinned Strand Without Braid. The cable has low-smoke, lead-free and silicone-free non-halogenated insulation. UL Central Office Power Cable 90°C dry, 60°C wet. UL Listed RHH/LS FT4 and VW-1, 90°C dry, 60°C wet, 600 volts. Sizes 1/0 and larger are UL, CT USE rated. CSA AWM I B 105°C, 600 volts.

Specifications

Southwire's TelcoFlex® II meets or exceeds the following:

- UL Listed As: Central Office Power Cable
- UL Listed Standard 44: Thermoset Insulated Type RHH/ST1
- FT-4 Flame Test
- VW-1
- ASTM B-33 and B172 for Flexible Strand
- Physical and Electrical tests in accordance with UL Standard 44 Requirements
- CSA AWM I B 105°C
- GR - 347 - CORE Audited by Telcordia
- Meets the Requirements of WP93811 for Cold Flow (Creep) and Cut Through
- Non-Halogen
- Low Smoke - LS
- IEC 60674 and 60332 + others
- RoHS / REACH Compliant

Construction

Southwire's TelcoFlex® II Cable is single conductor with a class I (modified) bunched (8 and 6 AWG) and rope-bunched (4 AWG and larger) stranded tinned copper conforming to ASTM B-33 and Underwriter's Laboratories requirements. An opaque mylar tape shall be applied over the conductor to facilitate stripping. Insulation is 90°C rated low smoke, non-halogen, TelcoHyde® conforming to Underwriter's Laboratories Standard 44 and Telcordia Specification GR-347-CORE, also UL and CSA 105°C AWM rated. The insulation has a limiting oxygen index of 35%.

Conductors: Class I modified bunched (8 and 6 AWG) or rope-bunched (4 AWG and larger) stranded tin-coated copper conforming to ASTM B-33 and Underwriters' Laboratories Requirements. An opaque mylar tape shall be applied over the conductor to facilitate stripping.

Insulation: 90°C / 105°C rated low smoke, non-halogen TelcoHyde® conforming to Underwriters' Laboratories Standard 44, Subjects 509 and 758, and CSA C22.2 No. 210.2 M90. In addition, TelcoHyde® complies with the requirements of Telcordia Specification GR-347-CORE. The insulation has a limiting oxygen index of 35%.

Surface Marking: Two sides of the cable shall be printed using an ink of a contrasting color and with the following information: "SOUTHWIRE AIW™ CORD BRAND TELCOFLEX® II/KS24194™ L2 NON-HAL (UL) E18321 SIZE (AWG or KCMIL) 600 VOLTS RHH ST1 FT4 OR AWM 3578 60°C WET VW-1 --- LL8825 CSA AWM I B 105°C 600 VOLTS FT4-ST1 YEAR TIME JULIAN DATE --- MEETS IEC INCLUDING 60674 & 60332. Note: KS24194™ L2 printed on 8-750 only. Add "FOR CT USE" before "(AMW3578)" on Sizes 1/0 AWG and larger. Sequential footage markings shall be applied at 2 foot intervals on one side of the cable.



Southwire®
WE DELIVER POWER... RESPONSIBLY

TelcoFlex® III

600 Volts, Tinned Copper Conductor

Class B Strand With Braid, CSA certified, Non-Halogen Insulation

14 AWG - 750 KCMIL - Single Conductor

Applications

TelcoFlex® III Central Office Power Wire and Cable Class B Strand With Braid. The cable has low-smoke, lead-free and silicone-free non-halogenated insulation. UL Central Office Power Cable 105°C dry, 60°C wet. UL Listed RHH/LS FT4 and VW-1, 90°C dry, 60°C wet, 600 volts. Sizes 1/0 and larger are UL, CT USE rated. CSA AWM I B 105°C, 600 Volts, FT4-ST1.

Specifications

Southwire's TelcoFlex® III meets or exceeds the following:

- UL Listed RHH/LS
- VW-1
- Physical and Electrical tests in accordance with UL standard 44 requirements
- FT4- Flame Test
- ASTM B-33
- CSA AWM I B 105°C

Construction

Southwire's TelcoFlex® III cable is single conductor with a class B stranded tinned copper conforming to ASTM B-33 and Underwriters' Laboratories requirements. An opaque mylar tape shall be applied over the conductor to facilitate stripping. Insulation is 90°C rated low smoke, non-halogen, TelcoHyde® conforming to Underwriters' Laboratories standard 44 and Telcordia Specification GR-347-CORE, also UL and CSA 105°C AWM rated. The insulation has a limiting oxygen index of 35%.

Surface Marking: Two sides of the cable shall be printed using an ink of a contrasting color and with the following information:

"SOUTHWIRE AIW™ CORD BRAND TELCOFLEX® III/KS24194™ L3 NON-HAL (UL) E18321 SIZE (AWG or KCMIL) 600 VOLTS RHH ST1 FT4 OR AWM 3578 60°C WET VW-1 --- LL8825 CSA AWM I B 105°C 600 VOLTS FT4 YEAR TIME JULIAN DATE --- MEETS IEC INCLUDING 60674 & 60332. Add "FOR CT USE" before "(AMW3578)" on Sizes 1/0 AWG and larger. Sequential footage markings shall be applied at 2 foot intervals on one side of the cable.



TelcoFlex® IV

600 Volts, Tinned Copper Conductor

Class I Flexible Strand With Braid, CSA certified, Non-Halogen Insulation

8 AWG - 750 KCMIL - Single Conductor

Applications

TelcoFlex® IV Central Office Power Wire and Cable Class I Flexible Strand With Braid. The cable has low-smoke, lead-free and silicone-free non-halogenated insulation. UL Central Office Power Cable 105°C dry, 60°C wet. UL Listed RHH/LS FT4 and VW-1, 90°C dry, 60°C wet. 600 volts. Sizes 1/0 and larger are UL, CT USE rated. CSA AWM I B 105°C, 600 Volts, FT4-ST1.

Specifications

Southwire's TelcoFlex® IV meets or exceeds the following:

- UL Listed RHH/LS
- VW-1
- Physical and Electrical tests in accordance with UL standard 44 requirements
- FT4- Flame Test
- ASTM B-33
- CSA AWM I B 105°C

Construction

Southwire's TelcoFlex® IV cable is single conductor with a class I(modified) bunched (8 and 6 AWG) and rope-bunched (4 AWG and larger) stranded tinned copper conforming to ASTM B-33 and Underwriters' Laboratories requirements. An opaque mylar tape shall be applied over the conductor to facilitate stripping. Insulation is 90°C rated limited smoke, non-halogen, TelcoHyde® conforming to Underwriters' Laboratories standard 44 and Telcordia Specification GR-347-CORE, also UL and CSA 105°C AWM rated.


The insulation has a limiting oxygen index of 35%.

Surface Marking: Two sides of the cable shall be printed using an ink of a contrasting color and with the following information:


"SOUTHWIRE AIW™ CORD BRAND TELCOFLEX® IV/KS24194™ L4 NON-HAL (UL) E18321 SIZE (AWG or KCMIL) 600 VOLTS RHH ST1 FT4 OR AWM 3578 60°C WET VW-1 --- LL8825 CSA AWM I B 105°C 600 VOLTS FT4 YEAR TIME JULIAN DATE --- MEETS IEC INCLUDING 60674 & 60332. Add "FOR CT USE" before "(AMW 3578)" on Sizes 1/0 AWG and larger. Sequential footage markings shall be applied at 2 foot intervals on one side of the cable.



WE HELP DISTRIBUTORS PURSUE MARKETS



Wire & Cable
Largest inventory
in North America



Datacom
Largest inventory
in North America



Security & A/V
Largest inventory
in North America




**Industrial Networking
& Control**
#1 in Ethernet sales



Support Products
When you need us

WITH OUR NETWORK OF 40+ WAREHOUSES IN NORTH AMERICA, WE CAN HELP YOU BE MORE RESPONSIVE TO YOUR CUSTOMERS BY OPTIMIZING YOUR INVENTORY AND IMPROVING EFFICIENCY.

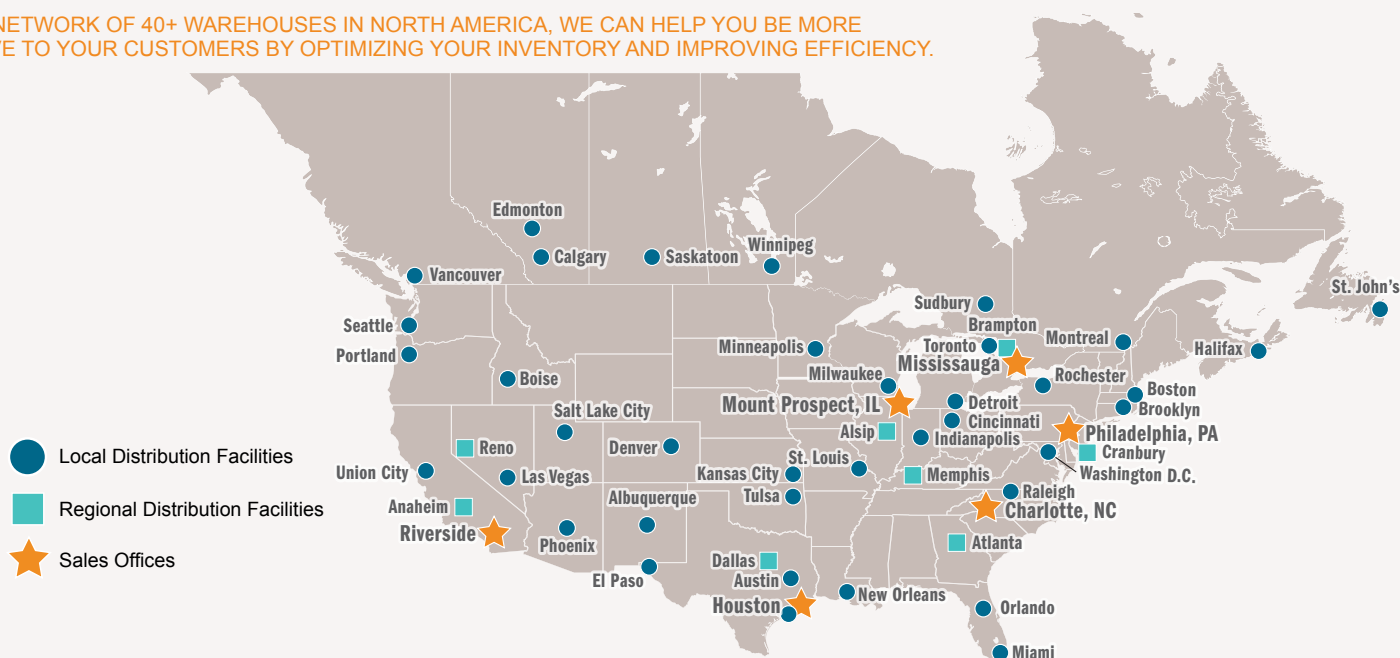

40+

WAREHOUSE LOCATIONS

NEARLY
600,000
PRODUCTS

OVER
\$1 BILLION
IN INVENTORY

VALUE-ADDED SERVICES

**NO
DROP-SHIP
CHARGES**

“BLIND-SHIP” CAPABILITIES

500+
TOP SUPPLIER
PARTNERS

**NO
CUTTING
CHARGES**

REGIONAL DISTRIBUTION FACILITIES

Alsip, Illinois - 680,000 sq. ft.
Cranbury, New Jersey - 282,000 sq. ft.
Reno, Nevada - 249,000 sq. ft.
Dallas, Texas - 196,000 sq. ft.
Houston, Texas - 240,000 sq. ft.
Memphis, Tennessee - 192,000 sq. ft.
Atlanta, Georgia - 185,000 sq. ft.
Anaheim, California - 100,000 sq. ft.
Mississauga, Ontario - 220,000 sq. ft.

LOCAL DISTRIBUTION FACILITIES

U.S.

Phoenix, Arizona
Union City, California
Denver, Colorado
Washington, D.C.
Orlando, Florida
Boise, Idaho
Indianapolis, Indiana
New Orleans, Louisiana
Detroit, Michigan
Minneapolis, Minnesota
Kansas City, Missouri

St. Louis, Missouri
Las Vegas, Nevada
Albuquerque, New Mexico
Brooklyn, New York
Raleigh, North Carolina
Cincinnati, Ohio
Tulsa, Oklahoma
Portland, Oregon
Austin, Texas
Houston, Texas
Seattle, Washington

Canada

Calgary, Alberta
Edmonton, Alberta
Vancouver, British Columbia
Winnipeg, Manitoba
St. Johns, Newfoundland
Halifax, Nova Scotia
Brampton, Ontario
Sudbury, Ontario
Toronto, Ontario
Montreal, Quebec
Saskatoon, Saskatchewan